

Lane Markers Detection based on Consecutive Threshold Segmentation

Huan Wang⁺, Mingwu Ren, Sulin Shao

School of computer science, Nanjing university of science & technology, Nanjing, PR. China. 210094

(Received March 29, 2011, accepted April 20, 2011)

Abstract. This paper proposed a simple and robust lane markers detection method for intelligent vehicle navigation. It needs not calculate inverse perspective map. The method uses multiple threshold segmentation instead of single threshold segmentation. And straight and curve lane markers are directly extracted in Run-Length accumulation (RLA) images. It performs well in various complex conditions and costs less than 50 ms for a 352 by 288 image. Experiments on many kinds of real complex image sequences demonstrate the effectiveness and efficiency of the proposed method.

Keywords: Automatic land vehicle Lane markers detection Weighted Hough Transformation

1. Introduction

Lane markers detection is a key technique for Automatic lane vehicle (ALV) navigation, intelligent traffic, driving safety and so on. Most of the previous researches were focused on the detection of lane markers on structured road such as highway roads. However, lane detection in non-structured or semi-structured road is a more challenge task due to parked and moving vehicles, bad quality lines, shadows cast from buildings, trees, and other vehicles, sharper curves, irregular/strange lane shapes, emerging and merging lanes, sun glare, writings and other markings on the road (e.g. pedestrian crosswalks), different pavement materials, and different slopes. The method proposed by Ref. [1] is based on generating a birds-eye view of the road by inverse perspective mapping (IPM), which needs camera calibration. Ref. [2] uses three-feature based method to detect and track lane markers, which can only adapt to the slow varying of lanes. Color segmentation method is applied to preprocess and highlight lane pixels in [3,4], but it is sensitive to the change in ambient light color. In this paper, we propose a simple but robust lane markers detection method for intelligent vehicle navigation without generating inverse perspective map. The method uses multiple threshold segmentation instead of single threshold segmentation [9]. Straight and curve lane markers are directly extracted in Run-Length accumulation (RLA) images. It performs well in various complex conditions and costs less than 50 ms for a 352 by 288 image. Experiments on many kinds of real complex image sequences demonstrate the effectiveness and efficiency of the proposed method.

2. Proposed algorithm

The flowchart of the proposed algorithm is shown in Fig.1:

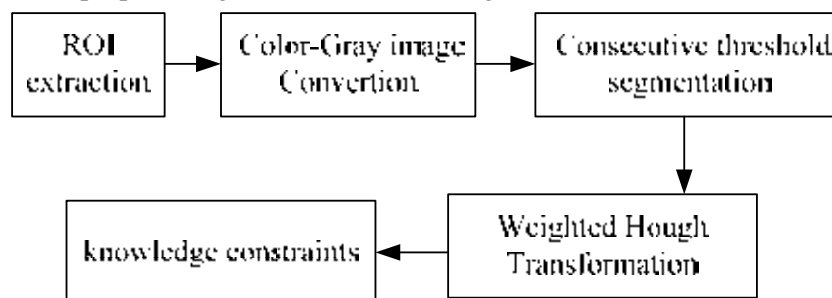


Fig.1 flowchart of the proposed algorithm

⁺ Corresponding author. E-mail address: wanghuan_ywzq@tom.com.

We aim to detect all potential lane makers which exist in a road image. Before detection, we need suitable preprocessing for alleviating distractions and improving processing speed. As is shown in Fig.2, we first select a rectangle-like region as region of interest (ROI) in order to remove the sky region and the region corresponds to the front part of vehicles. For each image, see Fig.2, all the following processing are then done within this ROI region. We call this region as original image without special explanation. Secondly, we transform color ROI image to a gray ROI image using Equation (1):

$$I=0.299*R+0.587*G+0.114*B \quad (1)$$

It is known that there are both white and yellow lane markers in general road scene. However, our algorithm is designed to detect them in a unified way. In RGB color space, white corresponds to (255, 255, 255) and yellow to (255, 255, 0), thus we ignore blue channel and using equation (2) instead of equation (1) to make the yellow markers being white ones. Therefore, we consider only white lane markers.

$$I = (R+G)/2 \quad (2)$$



Fig.2 ROI extraction, the green rectangle is ROI region.

2.1. Consecutive threshold segmentation

In order to detect lane makers, we usually need to find an optimal threshold which can separate lanes and background perfectly and use the threshold to segment an original image, result in clustering the background points to one class, and lane marker points to the other. It is hard to select such an optimal threshold to make sure the lane marker points be segment totally because of uneven illumination and cast shadows. Fortunately, if we use multiple thresholds in certain intensity range to binary an original image, where each binary image corresponding to each threshold may include parts of lane marker points. Fig.3 gives such an example, (a) is an original image, three binary images of (a) which corresponding to threshold 94,128,194 are shown in (b), (c) and (d) respectively. We can clearly observe that different parts of the two lane markers appear in different binary images. Therefore, by using a set of consecutive thresholds, we can collect all parts of lane marker points to obtain an integrated lane marker. In this section, we use consecutive threshold segmentation to detect lane marker points. Instead of selecting single threshold, consecutive threshold segmentation uses multiple thresholds and collects useful information from each segmented images.



Fig.3 (b),(c),and (d) are binary results of original image (a) with binary threshold 94, 128, 194 respectively.

Given a threshold t , we binary a gray original image I to a binary image B , which is:

$$B(x, y) = \begin{cases} 255 & I(x, y) > t \\ 0 & \text{else} \end{cases} \quad (3)$$

Suppose all gray intensity of lane markers vary from g_1 to g_2 , if we select a threshold t , if $t > g_2$, all lanes are included in background, if $g_1 < t < g_2$, we can obtain parts of lane marker points, if $t < g_1$, all lane

marker points are obtained. However, more and more background distractions will also be segmented as t decrease and the extraction of lanes could be affected. So we try to expect a high threshold t_2 and a low threshold t_1 , Let t_2 approximate g_2 and let t_1 be a little lower than g_1 . This expectation is based on histogram profile analysis, see Fig.4, we experimentally set:

$$t_1 = u \quad t_2 = u + 3s \quad (4)$$

where u and s are the mean and standard deviation of original image.

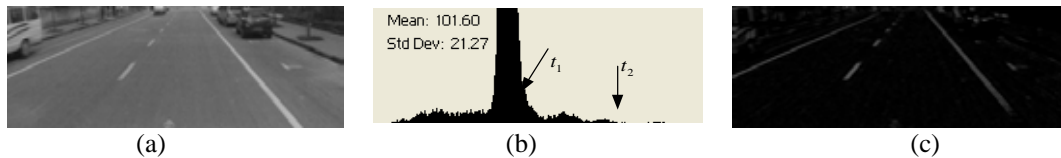


Fig.4 Consecutive threshold segmentation. (a) ROI image and transform RGB to gray image. (b) histogram of (a), (c) RLA image of (a).

Another key problem is how to select the part of lane marker points exist in each binary image. To sufficiently utilize structure information of lane markers, we introduce Run-Length (RL) description, a RL is a white line segment in a row or a column of an image. A RL will be selected from each binary image if its length satisfies certain length range.

Hence, for each binary image, we collect all the horizontal and vertical RLs whose length is within the interval $[l_1, l_2]$. We allocate a black image (all pixels' intensity are initially set to zero), which is the same size of original image. If one RL is select, the intensity of all pixels of the corresponding RL is progressive increased in the accumulation image. We call the accumulation image as RL accumulation (RLA) image. Fig.4 shows an example of RLA image. RLA image is essentially a saliency map, which clearly shows the probability of a pixel being a lane marker point. RLA image can withstand the illumination changes and shadow affection, and it can remove these markings, such as writings and stop lines on the road due to length constraint of RLs.

2.2. Weighted Hough Transformation

Hough transformation is a transformation between space position of points in image plane and parameter space of a specific model. The dimensions of the parameter space depend upon the selected model.

Equation of a straight line model is $y = ax + b$ in x-y plane with a, b as parameters. Alternatively we often use its parametric model in polar axis:

$$\rho = x \cos \theta + y \sin \theta \quad (5)$$

This parameter space works with θ and ρ , where θ is the angle of axis x and the perpendicular line of the straight line passing origin and ρ is the perpendicular distance of the line from origin.

As shown in last section, in a RLA image, the brighter the intensity of a pixel is, the more probability a lane marker point is. So we directly adopt straight line model Hough Transformation in the RLA image for finding lanes markers. Generally, the accumulation process in the parameter space of Hough Transformation is accumulating the number of points for each parameter bin. Since different points have different saliency, we should consider this fact in the accumulation process. Therefore, we adopt weighted Hough Transformation, it directly accumulate the intensity of each pixel in RLA image:

$$A(\rho, \theta) = A(\rho, \theta) + RLA(x, y) \quad (6)$$

where A is 2D array of parameter space, and x, y, ρ, θ satisfy equation (5), $RLA(x, y)$ represents the intensity of pixel (x, y) in RLA image.

We select all the local maximums from the accumulation values of all bins in the parameter space. Each local maximum corresponds to a possible lane marker. Therefore, we aim to find all valid ones which correspond to true lane markers from these maximums. We use sequential selection strategy to extract all possible lane markers sequentially in the accumulation image. See Fig.5. The most salient lane marker is first extracted, then the second most salient lane markers, then the third and so on. One point should be noticed

that we have to remove the suggest region of the selected lane before the next selection. Here, we define a support region as the region which is bounded by the two parallel lines with a suitable interval and boundaries of processing region of Weighted Hough Transformation.

Straight line model is competent in most of straight road scene. However, lane markers may be curve in turning roads, in this case the far end of a lane marker is often a curve, many methods use complex curve model[5,8] to approximate the curve markers. In our method, we use a local search and growing strategy to solve this problem. It is based on the straight line detected above. It only aims at processing the far end (curve part) of a lane since the near end can also be approximated well by straight line model. This strategy is not time consuming and performs well in our test sequences. It is a good complement of straight line model. In our method, straight line model based weighted Hough Transformation is first applied in the whole image to detect straight lanes, and the suggest region of the lane in image is removed. Then weighted Hough Transformation is again applied to the lower 1/3 region of the image, if a lane is also detected, search and growing process is triggered.

Fig.6 shows an RLA image to illustrate specific search and growing process. In Fig.6, the lower 1/3 region of a RLA image is concerned (the region below the white line), weighted Hough transformation is applied to find straight lines near the car head in these region (the yellow line). A circle window centers at the far end points of detected lines (red circle), and we cumulate the intensity summary of RLA image along its radius direction from 0 to 180 degree, the direction corresponds to the maximum summary is the direction the circle window should shift, namely the growing direction of lane marker (the red line). The center of circle window is shifted along the maximum summary direction until arrive at the point in the original circle window. For the new window (the green circle) after shifting, we cumulate the intensity summary of RLA image again to find maximum summary direction (the green line). The process is repeated until the maximum summary is below than a threshold or the circle window arrives at the image boundary.

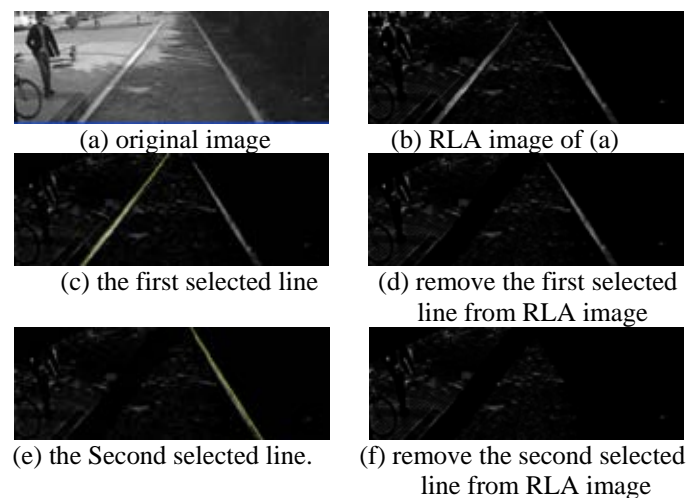


Fig.5 line detection process by weighted Hough transformation

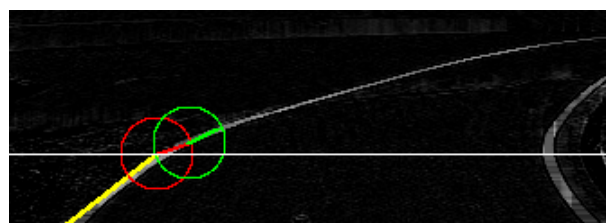


Fig.6 An illustration of the search and growing process.

2.3. Post-verifying by Knowledge Constraints

We measure the confidence of a lane marker in order to keep true detections and remove false detections by considering confidence of the lane marker itself and geometry relations with other lane markers.

For single lane marker, we use mean intensity $\bar{\mu}$ of its support region in the RLA image to measure its confidence. For geometry relations of any two lane markers, we use vanish point constraint and road area

constraint to measure confidence, where vanish point constraint make sure the intersection point of arbitrary two lanes is out of the ROI. Road area constraint makes sure the area of the region closed by the two lanes and the four boundaries of ROI should also be larger than a threshold. In summary, we apply following three constraints to remove false detections:

(i) The confidence of a lane marker should be larger than the threshold $T = (t_2 - t_1)/4$, where t_1, t_2 are the thresholds presented in section 2.1.

(ii) The area of the region between two lane markers and the up and bottom boundaries of the ROI should be larger than 1/4 of the area of the whole ROI region. If this condition is unsatisfied, the lane marker with the low confidence will be removed.

(iii) The row coordination of intersection point of any two lane markers should be smaller than Y_{top} , which is the row coordination of the top boundary of ROI. If this condition is unsatisfied, the lane marker with the low confidence will also be removed.

Finally, we determine lane marker type (left, middle or right) and color (white or yellow) by lane markers direction degree and mean intensity of lane marker support region in blue component of original image. For dashed lanes, temporal blurring [6] can be applied to enhance current RLA image by blurring RLA images from last N history frames, and Kalman filter [7] can also be used to limit the search range of weight Hough transformation and remove the inconsistency of the detection results in different frames.

3. Experiments

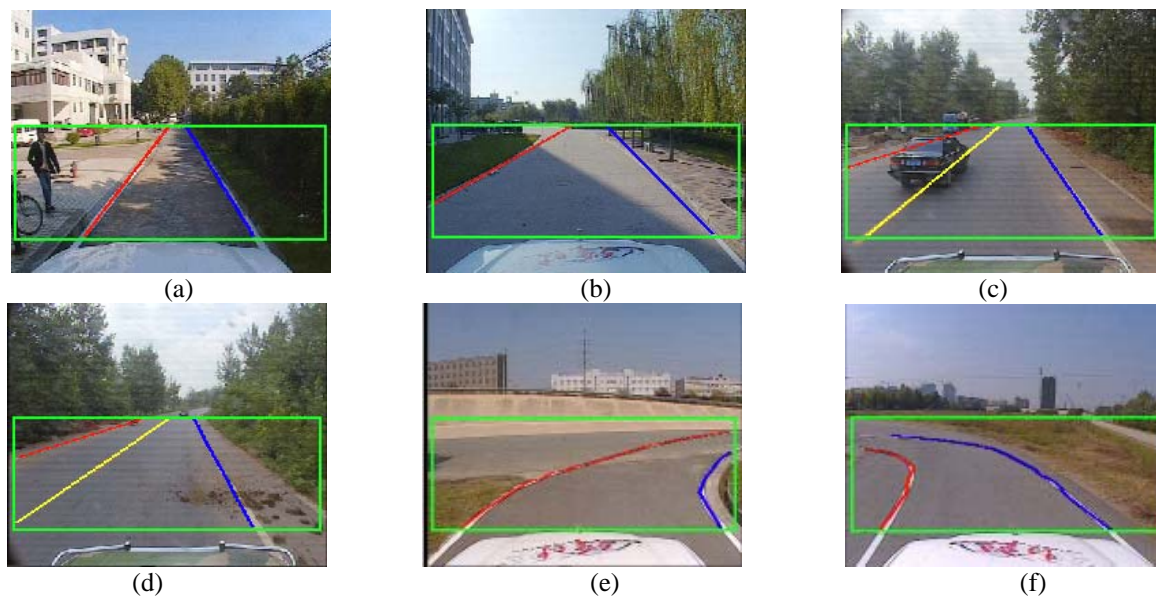


Fig. 7 lane markers detection results

All the experimental data in this paper are captured by a WAT1000E camera which was mounted in the front floor of our automatic lane vehicle. The image resolution is 352 by 288, and the capturing frequency is 25Hz. Some typical detection results and analysis are given in this section. In each result image, green rectangle represents ROI region. Left, middle and right lane markers are marked in red, yellow and blue color respectively. In Fig.7 (a), (b), shadow cast affects the detection of one of the lane markers seriously which lead to intensity inconsistent of lane markers. This is very difficult for single threshold segmentation algorithm. While in our method, the affected lane markers can be extracted due to consecutive threshold segmentation. In Fig.7(c),(d), the markers are occluded by other vehicles or contaminated by grain or dust. Hough Transformation is robust for line break. Weighted Hough Transformation further boosts this robustness by using uncovered marker points to estimate the whole lane marker. In Fig.7 (e),(f) gives two turning scenes. The lane marker shows large slope. Local search and growing strategy approximates the turning lane markers well. It is shown clearly that our method is competent in these complex cases. Fig.8 shows other detection results. Finally, we also test the average time cost of our method in all test sequences (more than ten scenes and twenty thousands frames). The average cost is 48.94 ms, which shows that the

proposed method is time efficient.



Fig. 8 Other lane markers detection results

4. Conclusions

This paper proposes a robust and real time lane markers detection method where consecutive threshold segmentation deviate the uneven illumination and shadows distractions, weighted Hough Transform further improves the accuracy of the marker localization, moreover, local search and growing approach realizes curve approximation in turning road scene. It needs no camera calibration and shows good performance in many complex scenes with low time cost.

5. Reference

- [1] A. Borkar, M Hayes, M.T.Stmth. Detecting Lane markers in complex urban Environments. *IEEE 7th international conference on mobile Adhoc and sensor systems*, 2010.
- [2] Yong UK Yim, Se-Young Oh. Three-Feature based automatic lane detection algorithm for Autonomous Driving. *IEEE Transaction on intelligent transportation system*. 2003, **4**(4): 219-224..
- [3] C.G.Rotaru, T.J.Zhang. Extracting road feature from color image using a cognitive approach. *IEEE intelligent vehicle symposium*. 2004, pp.298-303.
- [4] T.Y.Sun, S.J.Tsai, V.Chan. HIS color model based lane-marking detection. *IEEE intelligent transportation systems conference*. 2006, pp.1168-1172.
- [5] Mohamed Aly. Real time detection of lane markers in urban streets. *IEEE intelligent vehicles symposium*. 2008, pp.7-12.
- [6] A. Borkar, M Hayes, M.T.Stmth S. Pankani. A Layered approach to robust lane detection at night. *Computational intelligence in Vehicles and Vehicular systems*, 2009.
- [7] A. Borkar, M Hayes, M.T.Stmth. Robust lane detection and tracking with ransack and kalman filter. *International Conference on Image Processing*. 2009, pp.3261-3264.
- [8] Yue Wang, Eam Khwang Teoha, Dinggang Shenb. Lane detection and tracking using B-Snake. *Image and Vision Computing*. 2004, **22**, pp.269-280.
- [9] Kuo-Yu Chiu, Sheng-Fuu Lin. Lane detection using color-based segmentation. *IEEE intelligent vehicles symposium*. 2005, pp.706-711.