

High-order Difference Methods for Multi-scale Ground Water Flow^{*}

Jichun Li¹⁺, Zhongbo Yu²

¹Department of Mathematical Science, University of Nevada, Las Vegas, NV 89154-4020, USA.

²Department of Geoscience, University of Nevada, Las Vegas, NV89154-4010, USA.

(Received January 17 2007, accepted April 22 2007)

Abstract. In this paper, we develop several high-order finite difference schemes to simulate ground water flow in heterogeneous porous media. Our main purpose is to demonstrate that the high-order method can be used to resolve the fine scales efficiently for flow in heterogeneous porous media. The effectiveness of this approach is illustrated by two examples and detailed comparison with the classic second-order method and homogenization technique.

Keywords: Ground water, high-order scheme, heterogeneous media.

1. Introduction

One major difficult in analyzing ground water flow and solute transport is mainly caused by the heterogeneity of subsurface formations spanning many scales. Though many progress have been made in the past three decades in ground water simulation in highly heterogeneous media (Dagan, 1989; Zhang, 2002), our ability remains limited even with modern super-computers.

Many multiscale methods have been introduced in recent years, such as the multiscale finite element method (Hou et al, 1997; Hughes et al, 1998), methods based on the homogenization theory (Dylcaar et al, 1992), upscaling methods (Arbogast, 2003), and the heterogeneous multiscale methods (E et al, 2003). The central goal of these methods is to efficiently capture the large scale behavior of the solution without resolving the small scale features. However, in some cases we have to obtain very accurately the small scale effect on the large scale applications, then we have to resolve all the fine scales as accurate as possible. Some recent direct simulations of flow and transport in heterogeneous porous media are reported (Ababou et al, 1989; Burr et al, 1994; Tompson, 1993). But they are all based on low-order schemes. Considering the success of high-order methods for direct simulation of turbulent flows and wave propagation problems with a range of spatial scales (Lele, 1992; Gaitonde et al, 1998; Li, 2005; Li et al, 2006), our goal in this paper is to develop high-order difference schemes for directly simulating groundwater flow problems in heterogeneous media. One major advantage of high-order methods is that much fewer mesh points are needed in order to achieve the same accuracy compared to widely adopted low-order methods in ground water modeling (Wang et al 1982; Zheng et al, 2002), which fact makes directly solving multiscale problems possible by using high-order methods. For simplicity, in this paper we only focus on the ground water flow problem

$$S_s \frac{\partial u}{\partial t} = \frac{\partial}{\partial x} (K_x \frac{\partial u}{\partial x}) + \frac{\partial}{\partial y} (K_y \frac{\partial u}{\partial y}) + R$$

where u is the hydraulic head, K_x and K_y are the hydraulic conductivity in x and y direction, respectively, S is the specific storage, and R is the fluid sink/source term. More complicated problems will be investigated in our future work.

The remainder of this paper is organized as follows. In Section 2, we focus on the development of some high-order difference schemes. Then we test our high-order schemes for ground water flow problems

^{*} This work was partially supported by the National Science Foundation under grant INT-0328186 and Grant No. 0447416 (Nevada NSF EPSCoR Ring True Program III).

⁺ Corresponding author. Tel.: 1(702)895-0365; Fax: 1(702)895-4343. E-mail address: jichun@unlv.nevada.edu.

with highly oscillatory hydraulic conductivity. Section 4 is reserved for some conclusions.

2. The algorithms

For simplicity, we focus on the one-dimensional case

$$\frac{\partial}{\partial x} \left(K \frac{\partial u}{\partial x} \right) = R \quad 0 < x < 1 \tag{1}$$

$$u|_{x=0} = u_l, \quad u|_{x=1} = u_r \tag{2}$$

considering that analytical solutions in higher dimensions are difficult to obtain for accuracy comparison. We assume a uniform mesh, consisting of N points, i.e., $x_i = (i-1)\Delta x$, $i = 1, 2, \dots, N$, where the mesh size $\Delta x = 1/(N-1)$, and $x_{i+1/2}$ denote the mid-points. We can solve (1)-(2) by a classic second-order difference scheme

$$K_{i+1/2} \frac{u_{i+1} - u_i}{\Delta x} - K_{i-1/2} \frac{u_i - u_{i-1}}{\Delta x} = \Delta x R_i \quad 2 \leq i \leq N-1,$$

where we denote u_i the approximate solution of u at point x_i , $K_{i+1/2} = K(x_{i+1/2})$, $R_i = R(x_i)$. To construct a high-order difference scheme, we integrate (1) in x over the interval $[x_{i-1/2}, x_{i+1/2}]$, $i = 2, 3, \dots, N-1$, we obtain

$$K_{i+1/2} \left. \frac{\partial u}{\partial x} \right|_{x_{i+1/2}} - K_{i-1/2} \left. \frac{\partial u}{\partial x} \right|_{x_{i-1/2}} = \int_{x_{i-1/2}}^{x_{i+1/2}} R(x) dx \tag{3}$$

where the derivatives $\partial u / \partial x$ at the mid-points will be approximated by high-order difference formulas given below. The integral is approximated by the four-point Gaussian quadrature, hence the global accuracy is dominated by the derivative errors.

2.1. The fourth-order scheme

For: $i = 2, 3, \dots, N-1$, we have (Lele, 1992, equation (B.1.3))

$$\left. \frac{\partial u}{\partial x} \right|_{x_{i+1/2}} = b \frac{u_{i+2} - u_{i-1}}{3\Delta x} + a \frac{u_{i+1} - u_i}{\Delta x} \tag{4}$$

where $a=9/8$, $b= -1/8$. This formula has a truncation error $\frac{9}{1920} (\Delta x)^4 u^{(5)}$.

For the near boundary points $x_{3/2}, x_{N-1/2}$, special formulas are needed. For fourth-order accuracy, we have (Gaitonde et al, 1998, Table 2.11)

$$\begin{aligned} \left. \frac{\partial u}{\partial x} \right|_{x_{3/2}} &= [a_1 u_1 + a_2 u_2 + a_3 u_3 + a_4 u_4 + a_5 u_5] / (\Delta x) \\ \left. \frac{\partial u}{\partial x} \right|_{x_{N-1/2}} &= -[a_1 u_N + a_2 u_{N-1} + a_3 u_{N-2} + a_4 u_{N-3} + a_5 u_{N-4}] / (\Delta x) \end{aligned}$$

where

$$a_1 = -\frac{22}{24}, a_2 = \frac{17}{24}, a_3 = \frac{3}{8}, a_4 = -\frac{5}{24}, a_5 = \frac{1}{24}$$

For third-order accuracy, we have (Gaitonde et al, 1998, Table 2.11)

$$\begin{aligned} \left. \frac{\partial u}{\partial x} \right|_{x_{3/2}} &= [b_1 u_1 + b_2 u_2 + b_3 u_3 + b_4 u_4] / (\Delta x) \\ \left. \frac{\partial u}{\partial x} \right|_{x_{N-1/2}} &= -[b_1 u_N + b_2 u_{N-1} + b_3 u_{N-2} + b_4 u_{N-3}] / (\Delta x) \end{aligned}$$

where

$$b_1 = -\frac{23}{24}, b_2 = \frac{7}{8}, b_3 = \frac{1}{8}, b_4 = -\frac{1}{24}.$$

To distinguish different order schemes, we use the simple notation b-i-b for a scheme with *i*th-order for interior points, and *b*th-order for near boundary points. For example, 4-4-4 denotes a scheme with fourth-order for both interior and near boundary points.

2.2. The sixth-order scheme

For $i = 4, 5, \dots, N - 3$, we have (Lele, 1992, equation (B.1.4))

$$\frac{\partial u}{\partial x} \Big|_{i+1/2} = \tilde{c} \frac{u_{i+3} - u_{i-2}}{5\Delta x} + \tilde{b} \frac{u_{i+2} - u_{i-1}}{3\Delta x} + \tilde{a} \frac{u_{i+1} - u_i}{\Delta x} \tag{5}$$

Where $\tilde{a} = 150/128, \tilde{b} = -25/128, \tilde{c} = 3/128$. This formula has a truncation error $\frac{75}{107520}(\Delta x)^6 u^{(7)}$

Due to wider stencils, special fommla are needed for the near boundary points $x_{i+1/2}, i = 2, 3, \dots, N - 1$. For fifth-order accuracy, we have (Gaitonde et al, 1998, Table 2.11)

$$\frac{\partial u}{\partial x} \Big|_{3/2} = [\tilde{a}_1 u_1 + \tilde{a}_2 u_2 + \tilde{a}_3 u_3 + \tilde{a}_4 u_4 + \tilde{a}_5 u_5 + \tilde{a}_6 u_6] / (\Delta x)$$

$$\frac{\partial u}{\partial x} \Big|_{N-1/2} = -[\tilde{a}_1 u_N + \tilde{a}_2 u_{N-1} + \tilde{a}_3 u_{N-2} + \tilde{a}_4 u_{N-3} + \tilde{a}_5 u_{N-4} + \tilde{a}_6 u_{N-5}] / (\Delta x)$$

where

$$\tilde{a}_1 = -\frac{563}{640}, \tilde{a}_2 = \frac{67}{128}, \tilde{a}_3 = \frac{143}{192}, \tilde{a}_4 = -\frac{37}{64}, \tilde{a}_5 = \frac{29}{128}, \tilde{a}_6 = \frac{71}{1920}$$

Now we shall derive the fifth-order sheme for nodes $x_{i+1/2}, i = 3, \dots, N - 2$. We assume

$$\frac{\partial u}{\partial x} \Big|_{5/2} = [\tilde{b}_1 u_1 + \tilde{b}_2 u_2 + \tilde{b}_3 u_3 + \tilde{b}_4 u_4 + \tilde{b}_5 u_5 + \tilde{b}_6 u_6] / (\Delta x)$$

where the coefficients $\tilde{b}_i, i = 1, 2, \dots, 6$, can be determined by Taylor expansion to the order of $O(\Delta x)^5$:

$$\begin{aligned} &\tilde{b}_1 + \tilde{b}_2 + \tilde{b}_3 + \tilde{b}_4 + \tilde{b}_5 + \tilde{b}_6 = 0 \\ &(-\frac{3}{2})^1 \tilde{b}_1 + (-\frac{1}{2})^1 \tilde{b}_2 + (\frac{1}{2})^1 \tilde{b}_3 + (\frac{3}{2})^1 \tilde{b}_4 + (\frac{5}{2})^1 \tilde{b}_5 + (\frac{7}{2})^1 \tilde{b}_6 = 1 \\ &(-\frac{3}{2})^2 \tilde{b}_1 + (-\frac{1}{2})^2 \tilde{b}_2 + (\frac{1}{2})^2 \tilde{b}_3 + (\frac{3}{2})^2 \tilde{b}_4 + (\frac{5}{2})^2 \tilde{b}_5 + (\frac{7}{2})^2 \tilde{b}_6 = 0 \\ &(-\frac{3}{2})^3 \tilde{b}_1 + (-\frac{1}{2})^3 \tilde{b}_2 + (\frac{1}{2})^3 \tilde{b}_3 + (\frac{3}{2})^3 \tilde{b}_4 + (\frac{5}{2})^3 \tilde{b}_5 + (\frac{7}{2})^3 \tilde{b}_6 = 0 \\ &(-\frac{3}{2})^4 \tilde{b}_1 + (-\frac{1}{2})^4 \tilde{b}_2 + (\frac{1}{2})^4 \tilde{b}_3 + (\frac{3}{2})^4 \tilde{b}_4 + (\frac{5}{2})^4 \tilde{b}_5 + (\frac{7}{2})^4 \tilde{b}_6 = 0 \\ &(-\frac{3}{2})^5 \tilde{b}_1 + (-\frac{1}{2})^5 \tilde{b}_2 + (\frac{1}{2})^5 \tilde{b}_3 + (\frac{3}{2})^5 \tilde{b}_4 + (\frac{5}{2})^5 \tilde{b}_5 + (\frac{7}{2})^5 \tilde{b}_6 = 0 \end{aligned}$$

which gives the solution

$$\tilde{b}_1 = \frac{71}{1920}, \tilde{b}_2 = -\frac{141}{128}, \tilde{b}_3 = \frac{69}{64}, \tilde{b}_4 = \frac{1}{192}, \tilde{b}_5 = -\frac{3}{128}, \tilde{b}_6 = \frac{3}{640}.$$

Similarly, it is easy to prove the following fifth-order scheme

$$\frac{\partial u}{\partial x} \Big|_{N-3/2} = -[\tilde{b}_1 u_N + \tilde{b}_2 u_{N-1} + \tilde{b}_3 u_{N-2} + \tilde{b}_4 u_{N-3} + \tilde{b}_5 u_{N-4} + \tilde{b}_6 u_{N-5}] / (\Delta x)$$

To distinguish different order schemes, we use simple notation b-b-i-b-b for a scheme with *i*th-order for interior points, and *b*th-order for near boundary points, For example, 5-5-6-5-5 denotes a scheme with sixth-

order for interior points, and fifth-order for near boundary points.

3. Numerical examples

Example 1. Here we solve the problem (1)-(2) with

$$K(x, x/\varepsilon) = 1/(2 + A \sin \frac{2\pi x}{\varepsilon}), u_i = 2, u_r = 1, R = 1.$$

Using integration by parts, we can easily obtain the exact solution of (1)-(2)

$$u_{ex}(x) = x^2 + 2Cx - A \frac{\varepsilon}{2\pi} x \cos(\frac{2\pi x}{\varepsilon}) + A(\frac{\varepsilon}{2\pi})^2 \sin(\frac{2\pi x}{\varepsilon}) - AC \frac{\varepsilon}{2\pi} \cos(\frac{2\pi x}{\varepsilon}) + D$$

where $C = A\varepsilon/4\pi - 1$, $D = 2 + AC\varepsilon/2\pi$, the coefficient K is highly oscillatory, an example is shown in Fig.1 for the case of $A = 1.9$, $\varepsilon = 0.1$.

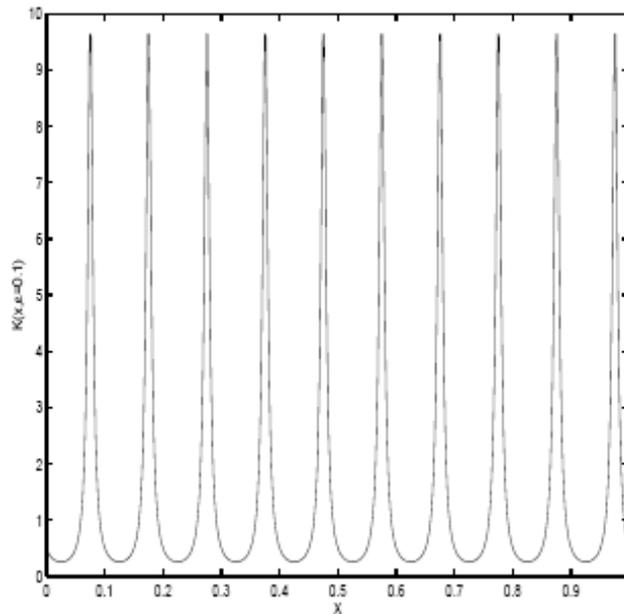


Fig. 1 The plot for the coefficient K of Example 1 with $A = 1.9$, $\varepsilon = 0.1$

We solved the problem with $A = 1.9$, $\varepsilon = 0.1, 0.01$, by schemes of different orders. The convergence rate is estimated by $r = \log(e_N / e_{2N}) / \log(2)$, where e_N, e_{2N} denote the maximum errors achieved with N and $2N$ uniform subintervals. Detailed convergence rates and CPU time used for different. schemes are presented in Tables 1 and 2 for $\varepsilon = 0.1, 0.01$, respectively.

Our numerical results show clearly that the high-order schemes can achieve several order magnitude better than the classic second-order scheme with the same number of mesh points (see Fig.2). To achieve a fixed accuracy, the high-order schemes need much less mesh points than the second-order scheme (see Fig.3). For example, with $\varepsilon = 0.1$, the second-order scheme's maximum error is $5.7227e-7$ using $N = 4001$ points, while both 4-4-6-4-4 and 5-5-6-5-5 schemes has the maximum error $2.2700e-7$ with only $N = 251$ points, This fact shows that the high-order schemes is very efficient and accurate for solving ground water flow problems in heterogeneous media directly.

Table 1. Maximum errors for Example 1 with $\varepsilon = 0.1$

Number of points	Maximum error	Convergence rate	CPU time(in seconds)
2nd-order scheme			
N=251	1.4656e-4	*	0.50
N=501	3.6617e-5	2.0009	0.60
N=1001	9.1570e-6	1.9996	0.88
N=2001	2.2891e-6	2.0001	1.76
N=4001	5.7227e-7	2.000	4.17
3-4-3 scheme			
N=251	4.9118e-6	*	0.77
N=501	3.2507e-7	3.9174	0.99
N=1001	2.0676e-8	3.9747	1.71
N=2001	1.3007e-9	3.9906	3.41
N=4001	1.1199e-10	3.5378	8.57
4-4-4 scheme			
N=251	5.3859e-7	*	0.77
N=501	5.5224e-8	3.2858	1.10
N=1001	3.8712e-9	3.8344	1.92
N=2001	2.4978e-10	3.9541	3.96
N=4001	1.2129e-10	*	11.32
4-4-6-4-4 scheme			
N=251	2.3379e-7	*	0.77
N=501	4.2398e-9	5.7851	1.15
N=1001	6.8838e-11	5.9446	2.08
N=2001	4.4063e-11	*	4.56
N=4001	5.3873e-11	*	12.74
5-5-6-5-5 scheme			
N=251	2.2700e-7	*	0.72
N=501	4.1447e-9	5.7753	1.37
N=1001	6.7752e-11	5.9349	2.47
N=2001	4.4182e-11	*	5.38
N=4001	5.3873e-11	*	14.28

Table 2. Maximum errors for Example 1 with $\varepsilon = 0.01$

Number of points	Maximum error	Convergence rate	CPU time(in seconds)
2nd-order scheme			
N=251	0.0017	*	0.49
N=501	3.7476e-4	2.1815	0.61
N=1001	9.9831e-5	1.9084	0.99
N=2001	2.4742e-5	2.0125	1.70
N=4001	6.1723e-6	2.0031	4.18
3-4-3 scheme			
N=251	0.0024	*	0.60
N=501	7.9233e-5	4.9208	0.94
N=1001	1.5846e-5	2.3220	1.65
N=2001	1.2253e-6	3.6929	3.35
N=4001	8.0814e-8	3.9244	8.57
4-4-4 scheme			
N=251	0.0031	*	0.72
N=501	3.0104e-4	3.3642	1.10
N=1001	1.0259e-5	4.8750	2.70
N=2001	1.9291e-7	5.7328	3.96
N=4001	1.3900e-8	3.7948	11.54
4-4-6-4-4 scheme			
N=251	0.0032	*	0.71
N=501	2.8470e-4	3.4906	1.09
N=1001	1.6937e-6	7.3931	2.09
N=2001	8.6371e-8	4.2935	4.56
N=4001	1.6422e-9	5.7168	13.79
5-5-6-5-5 scheme			
N=251	0.0032	*	0.77
N=501	2.8564e-4	3.4858	1.48
N=1001	1.5199e-6	7.5541	2.47
N=2001	8.3970e-8	4.1780	5.28
N=4001	1.6073e-9	5.7072	14.39

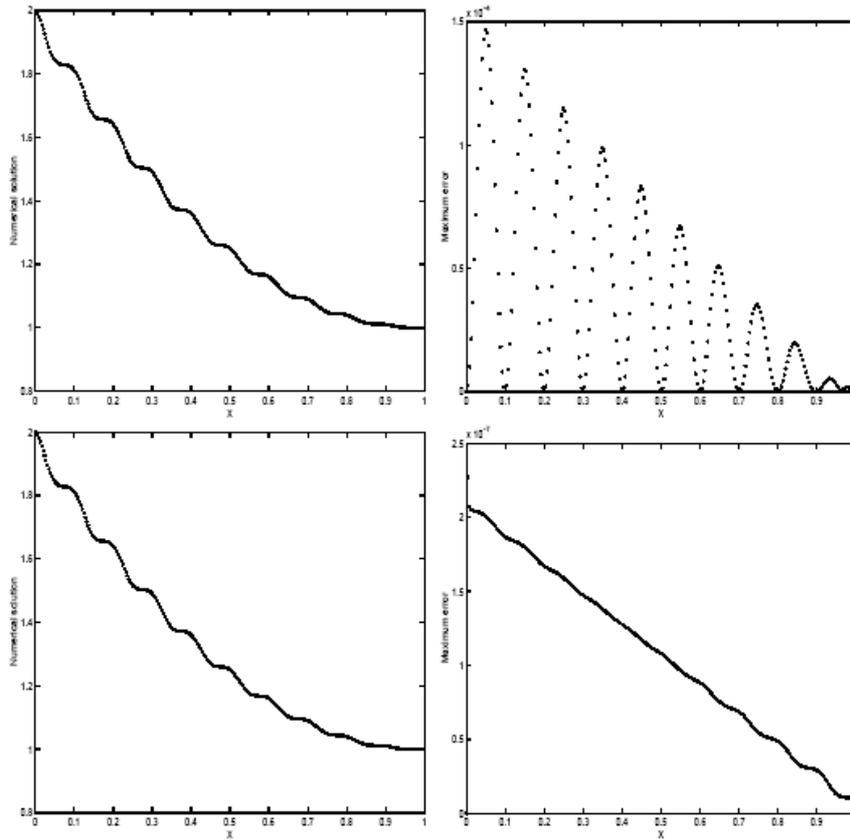


Fig. 2. Example 1 with $\varepsilon = 0.01$. Top row shows the numerical solution (Left) and pointwise maximum error (Right) obtained with the 2nd-order scheme with $N=251$ points. Bottom row shows the numerical solution (Left) and pointwise maximum error (Right) obtained with the 5-5-6-5-5 scheme with $N=251$ points.

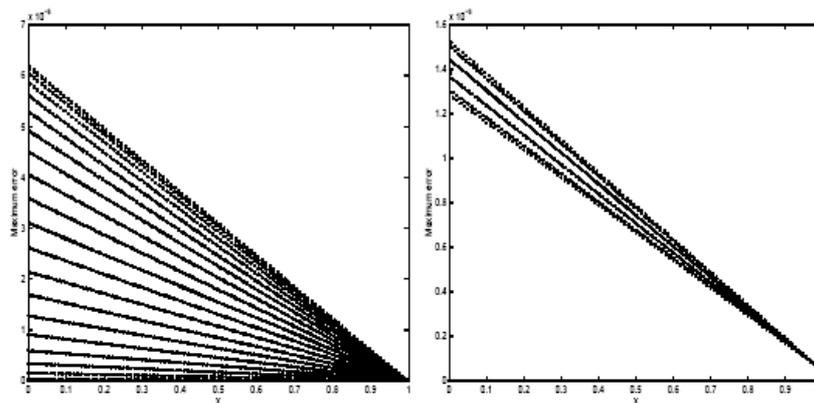


Fig. 3. Example 1 with $\varepsilon = 0.01$. Pointwise maximum errors obtained by the 2nd-scheme with $N=4001$ points (left) and by the 5-5-6-5-5 scheme with $N=1001$ points (Right).

Finally, we want to mention that the homogenized problem (Avellaneda et al, 1991, p.695) of (1)-(2) is:

$$\frac{\partial}{\partial x} \left(\bar{K} \frac{\partial \bar{u}}{\partial x} \right) = R \quad 0 < x < 1 \tag{6}$$

$$\bar{u} \Big|_{x=0} = u_l, \quad \bar{u} \Big|_{x=1} = u_r \tag{7}$$

Where $\bar{K} = \left[\int_0^1 \frac{1}{K(x, y)} dy \right]^{-1}$. Hence for our example, we can easily check that

$$\bar{K} = \left(\int_0^1 (2 + A \sin 2\pi y) dy \right)^{-1} = 1/2$$

and the homogenized solution

$$\bar{u}(x) = x^2 - 2x + 2$$

And the Darcy velocity $\bar{q} = -\bar{K} \partial \bar{u} / \partial x = -(x + C)$, which shows that the maximum errors between the homogenized and exact solution (or Darcy velocity) will be

$$\sup_{0 \leq x \leq 1} |u_{ex}(x) - \bar{u}(x)| \leq C\varepsilon, \quad \sup_{0 \leq x \leq 1} |q_{ex}(x) - \bar{q}(x)| \leq C\varepsilon.$$

This means that the homogenized problem is not a very accurate approximation to the original multiscale problem. We demonstrate this by solving the homogenized problem with $\varepsilon = 0.1$ using 5-5-6-5-5 scheme with 251 points, the homogenized solution and the maximum errors between the homogenized and exact solution are presented in Fig.4.

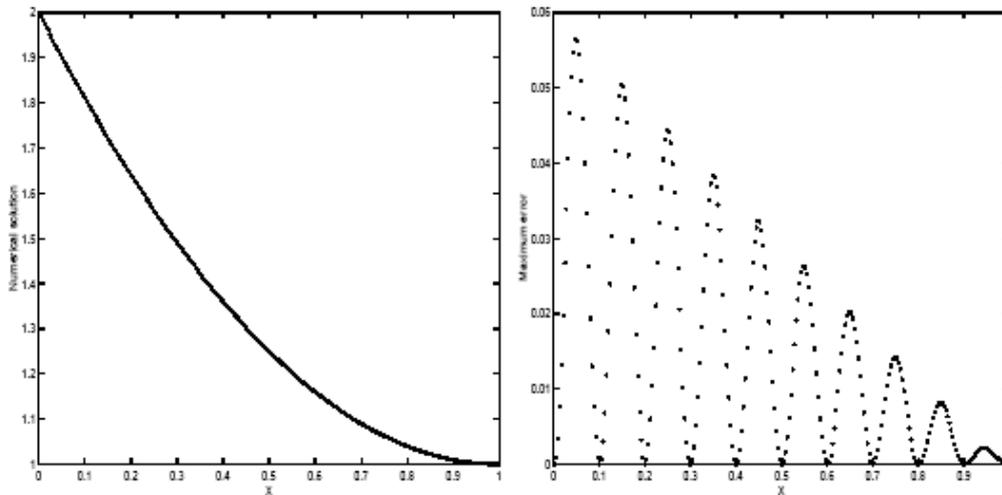


Fig. 4. The homogenized solution (Left) and maximum errors (Right) between the homogenized and exact solution obtained with the 5-5-6-5-5 scheme with $N=251$ points and $\varepsilon = 0.1$.

Example 2. In this example, we consider a case with multi-scale hydraulic conductivity, i.e., we solve the problem (1)-(2) with $u_l=2, u_r=1, R=1$, and

$$K(x, \varepsilon) = 1 / (5 + A_1 \sin(2\pi f_1 x) + A_2 \sin(2\pi f_2 x) + A_3 \sin(2\pi f_3 x))$$

Using integration by parts, we can easily obtain the exact solution of (1)-(2)

$$\begin{aligned} u_{ex}(x) = & \frac{5}{2} x^2 + 5Cx + D \\ & + A_1 \left[-\frac{1}{2\pi f_1} x \cos(2\pi f_1 x) + \left(\frac{1}{2\pi f_1}\right)^2 \sin(2\pi f_1 x) - \frac{C}{2\pi f_1} \cos(2\pi f_1 x) \right] \\ & + A_2 \left[-\frac{1}{2\pi f_2} x \cos(2\pi f_2 x) + \left(\frac{1}{2\pi f_2}\right)^2 \sin(2\pi f_2 x) - \frac{C}{2\pi f_2} \cos(2\pi f_2 x) \right] \\ & + A_3 \left[-\frac{1}{2\pi f_3} x \cos(2\pi f_3 x) + \left(\frac{1}{2\pi f_3}\right)^2 \sin(2\pi f_3 x) - \frac{C}{2\pi f_3} \cos(2\pi f_3 x) \right] \end{aligned}$$

where

$$C = \frac{1}{5} \left(\frac{A_1}{2\pi f_1} + \frac{A_2}{2\pi f_2} + \frac{A_3}{2\pi f_3} - \frac{7}{2} \right), \quad D = 2 + C \left(\frac{A_1}{2\pi f_1} + \frac{A_2}{2\pi f_2} + \frac{A_3}{2\pi f_3} \right).$$

An example of coefficient K is shown in Fig.5 for the case of $A_1 = A_3 = 1, A_2 = 2, f_1 = 2, f_2 = 8, f_3 = 32$.

We performed many experiments with different order schemes and number of mesh points. Our results show once more that the high-order schemes can achieve several order magnitude better than the classic second-order scheme with the same number of mesh points. Some representative results are provided in Table 3 and Fig. 6.

4. Conclusions

In summary, we have developed both fourth- and sixth-order difference methods for solving heterogeneous ground water flow problems. The high-order methods can achieve the same accuracy with less nodal points compared to the classical low-order methods, which fact makes high-order methods very attractive for problem with multiscales. Two one-dimensional examples containing multiple scales are presented and the results demonstrate the efficiency of the high-order methods through detailed comparisons with the second-order methods and the homogenized solution. The high-order methods can be extended to both higher dimension problems and time-dependent problems, see (Gaitonde et al. 1998; Li , 2005; Li et al, 2006) and references therein. More complex ground water flows in heterogeneous media will be investigated and reported in our future work.

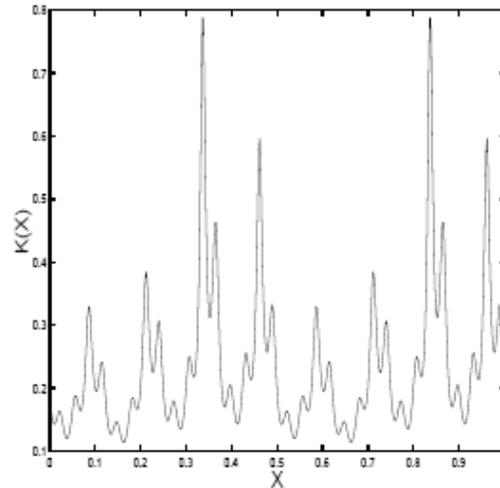


Fig. 5. The plot for the coefficient K of example 2 with $A_1 = A_3 = 1, A_2 = 2, f_1 = 2, f_2 = 8, f_3 = 32$.

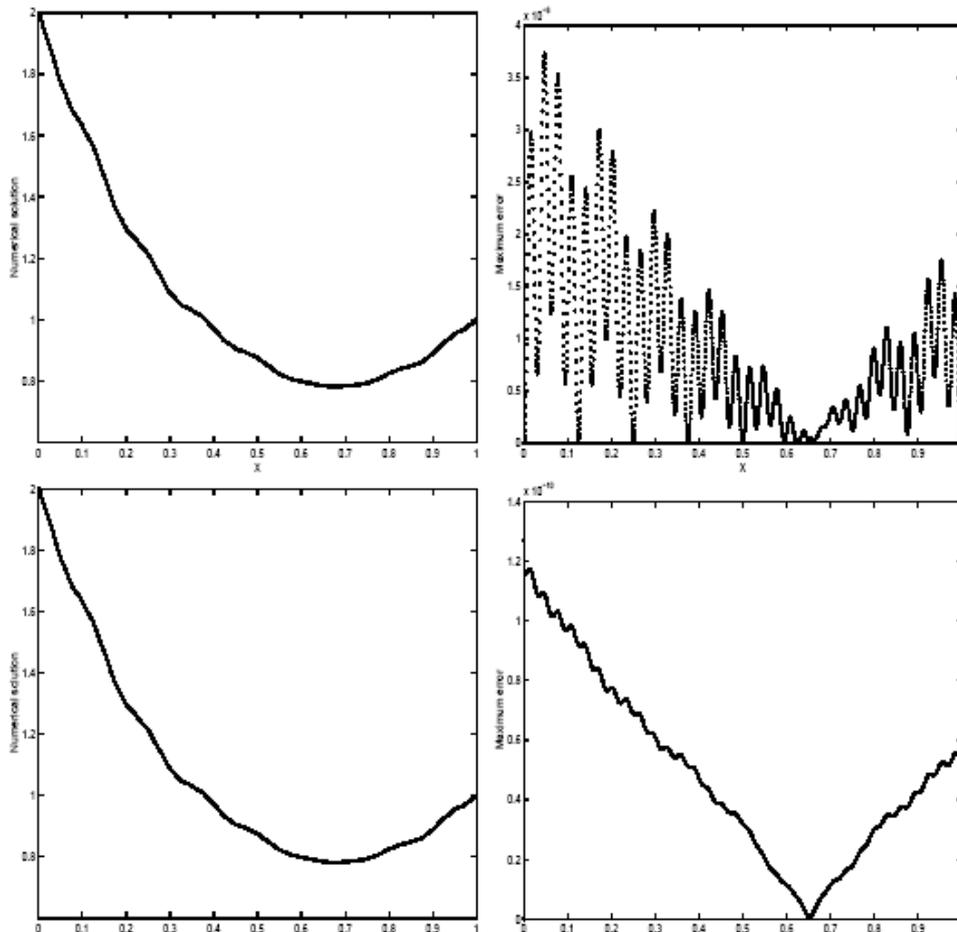


Fig. 6. Example 2. Top row shows the numerical solution (Left) and pointwise maximum error (Right) obtained with the 2nd-order scheme with $N=2001$ points. Bottom row shows the numerical solution (Left) and pointwise maximum error (Right) obtained with the 5-5-6-5 scheme with $N=2001$ points.

Table 3. Maximum errors for Example 2

Number of points	Maximum error	Convergence rate	CPU time(in seconds)
2nd-order scheme			
N=251	2.4070e-4	*	0.50
N=501	5.9572e-5	2.0145	0.66
N=1001	1.4935e-5	1.9959	0.99
N=2001	3.7315e-6	2.0009	1.81
N=4001	9.3275e-7	2.0002	4.28
5-5-6-5-5 scheme			
N=251	4.7953e-6	*	0.71
N=501	3.2590e-7	3.8791	1.15
N=1001	7.4322e-9	5.4545	2.25
N=2001	1.2681e-10	5.8730	4.78
N=4001	1.2062e-11	3.3941	12.80

5. References

- [1] R. Ababou, D. McLaughlin, and L.W. Gelhar, Numerical simulation of three-dimensional saturated flow in randomly heterogeneous porous media. *Transport in Porous Media*, 1989, **4**: 549-565.
- [2] T. Arbogast. An overview of subgrid upscaling for elliptic problems in mixed form. In: Chen, Z., Glowinski, R., Li, K. (eds.) *Current Trends in Scientific Computing*, American Mathematical society, Providence, 2003, 21-32.
- [3] M. Avellaneda, Th. Y. Hou, and G.C. Papanicolaou. Finite difference approximations for partial differential equations with rapidly oscillating coefficients. *Mathematical Modeling and Numerical Analysis*, 1991, **25**: 693-710.
- [4] D.T. Burr, E.A. Sudicky, and R.L. Naff. Nonreactive and reactive solute transport in three-dimensional heterogeneous porous media: Mean displacement, plume spreading and uncertainty, *Water Resource Research*, 1994, **30**: 791-816
- [5] G. Dagan. *Flow and Transport in Porous Formations*. New York: Springer-Verlag,, 1989.
- [6] B.B. Dykaar, and P.K. Kitanidis. Determination of the effective hydraulic conductivity for heterogeneous porous media using a numerical spectral approach. *Water Resource Research*, 1992, **28**: 1155-1166.
- [7] E. W., and B. Engquist. The heterogeneous multiscale methods. *Communications in Mathematical Sciences*, 2003, **1**: 87-132.
- [8] D.V. Gaitrknede, and M.R. Vishal. High-order schemes for Navier-Stokes equations: algorithms and implementation into FDL3DI. *Technical report AFRL-VA-WP-TR-1998-3060*, Air Force Research Laboratory, Wright-Patterson AFB, Ohio, 1998, 28.
- [9] T.Y. Hou, and X.H. Wu. A multiscale finite element method for elliptic problems in composite materials and porous media. *Journal of Computational Physics*, 1997, **134**: 169-189.
- [10] T.J.R. Hughes, G.R. Feijo, L. Mazzei, and J.-B. Quincy. The variational multiscale method-paradigm for computational mechanics. *Computer Methods in Applied Mechanics and Engineering*, 1998, **166**: 3-24.
- [11] S.K. Lele. Compact finite difference schemes with spectral-like solution. *Journal of Computational Physics*, 1992, **103**: 16-42.
- [12] J. Li. High-order finite difference schemes for differential equations with higher derivatives. *Applied Mathematics and Computation*, 2005, **171**: 1157-1176.
- [13] J. Li, and M.R. Visbal. High-order compact schemes for nonlinear dispersive waves. *Journal of Scientific Computing*, 2006, **26**, 1-23.
- [14] A. F.B. Towson. Numerical simulation of chemical migration in physically and chemically heterogeneous porous media. *Water Resources Research*, 1993, **29**: 3709-3726.
- [15] H. F. Wang, and M. P. Anderson. *Introduction to Groundwater modeling: Finite Difference and Finite Element*. New York: W.H. Freeman. 1982.
- [16] D. Zhang, *Stochastic Methods for Flow in Porous Media*, Academic Press, San Diego, 2002.
- [17] C. Zheng, and G.D. Bennett, *Applied Contaminant Transport modeling*, 2nd edn, John Wiley & Sons, 2002.